

09/29/00

10-02-00

A

Please type a plus sign (+) inside this box → ☒

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 481340010027

First Inventor or Application Identifier Karmouch

Title Security Mechanisms and Architecture
For Collaborative Systems Using Table...

Express Mail Label No. EL486351872US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

- ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- ☒ Specification [Total Pages 23]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
- ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 6]
- Oath or Declaration [Total Pages 3]
 - ☒ Newly executed (original or copy)
 - ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

- ☐ Microfiche Computer Program (Appendix)
- Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - ☐ Computer Readable Copy
 - ☐ Paper Copy (identical to computer copy)
 - ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- ☒ Assignment Papers (cover sheet & document(s))
- ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
- ☐ English Translation Document (if applicable)
- ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- ☐ Small Entity Statement(s) [Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)]
- ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
- ☐ Other:

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

Name	David B. Cochran, Esq.				
	Jones, Day, Reavis & Pogue				
Address	North Point				
	901 Lakeside Avenue				
City	Cleveland	State	OH	Zip Code	44114
Country	US	Telephone	216/586-3939	Fax	216/579-0212

Name (Print/Type)	David B. Cochran	Registration No. (Attorney/Agent)	39,142
Signature	David B. Cochran	Date	9/29/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

09/29/00
09/29/00
09/29/00

FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$730.00)

Complete if Known

Application Number
Filing Date
First Named Inventor Karmouch
Examiner Name
Group / Art Unit
Attorney Docket No. 481340010027

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 501432

Deposit Account Name Jones, Day

- ☒ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:
☐ Check ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
101	690	201	345	Utility filing fee	690
106	310	206	155	Design filing fee	-
107	480	207	240	Plant filing fee	-
108	690	208	345	Reissue filing fee	-
114	150	214	75	Provisional filing fee	-

SUBTOTAL (1) (\$690.00)

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
9	20** = 0	X	-
2	3** = 0	X	-
Multiple Dependent			-

**or number previously paid, if greater; For Reissues, see below

Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
103	18	203	9	Claims in excess of 20	-
102	78	202	39	Independent claims in excess of 3	-
104	260	204	130	Multiple dependent claim, if not paid	-
109	78	209	39	** Reissue independent claims over original patent	-
110	18	210	9	** Reissue claims in excess of 20 and over original patent	-

SUBTOTAL (2) (\$-0-)

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	-
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	-
139	130	139	130	Non-English specification	-
147	2,520	147	2,520	For filing a request for reexamination	-
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	-
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	-
115	110	215	55	Extension for reply within first month	-
116	380	216	190	Extension for reply within second month	-
117	870	217	435	Extension for reply within third month	-
118	1,360	218	680	Extension for reply within fourth month	-
128	1,850	228	925	Extension for reply within fifth month	-
119	300	219	150	Notice of Appeal	-
120	300	220	150	Filing a brief in support of an appeal	-
121	260	221	130	Request for oral hearing	-
138	1,510	138	1,510	Petition to institute a public use proceeding	-
140	110	240	55	Petition to revive - unavoidable	-
141	1,210	241	605	Petition to revive - unintentional	-
142	1,210	242	605	Utility issue fee (or reissue)	-
143	430	243	215	Design issue fee	-
144	580	244	290	Plant issue fee	-
122	130	122	130	Petitions to the Commissioner	-
123	50	123	50	Petitions related to provisional applications	-
126	240	126	240	Submission of Information Disclosure Stmt	-
581	40	581	40	Recording each patent assignment per property (times number of properties)	40
146	690	246	345	Filing a submission after final rejection (37 CFR § 1.129(a))	-
149	690	249	345	For each additional invention to be examined (37 CFR § 1.129(b))	-

Other fee (specify) _____

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$40.00)

SUBMITTED BY

Name (Print/Type)	David B. Cochran	Registration No. (Attorney/Agent)	39,142	Complete (if applicable)	Telephone	216/586-3939
Signature	David B. Cochran	Date	9/21/2000			

WARNING:

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Variable	Mean	SD	Min	Max
Age	38.5	12.5	18	65
Gender	Male	Female	Male	Female
Marital Status	Married	Single	Married	Single
Education	High School	College	High School	College
Income	\$25,000	\$50,000	\$10,000	\$75,000
Health Status	Good	Fair	Good	Fair
Exercise Frequency	Weekly	Monthly	Weekly	Monthly
Stress Level	Low	High	Low	High
Sleep Quality	Good	Poor	Good	Poor
Dietary Habits	Healthy	Unhealthy	Healthy	Unhealthy
Work Hours	40	60	20	80
Family Size	2	4	1	6
Home Ownership	Owned	Rented	Owned	Rented
Commute Time	30	60	10	90
Neighborhood Safety	Safe	Unsafe	Safe	Unsafe
Access to Healthcare	Yes	No	Yes	No
Health Insurance	Medicare	Medicaid	Medicare	Medicaid
Chronic Conditions	None	One or More	None	One or More
Medication Use	Regular	Occasional	Regular	Occasional
Healthcare Costs	\$100	\$500	\$50	\$1,000
Healthcare Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare Access	Easy	Difficult	Easy	Difficult
Healthcare Quality	High	Low	High	Low
Healthcare Availability	Yes	No	Yes	No
Healthcare Affordability	Yes	No	Yes	No
Healthcare Accessibility	Yes	No	Yes	No
Healthcare Effectiveness	Yes	No	Yes	No
Healthcare Safety	Yes	No	Yes	No
Healthcare Quality of Care	High	Low	High	Low
Healthcare Patient Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare Provider Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Performance	Good	Poor	Good	Poor
Healthcare System Efficiency	High	Low	High	Low
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality	High	Low	High	Low
Healthcare System Availability	Yes	No	Yes	No
Healthcare System Affordability	Yes	No	Yes	No
Healthcare System Accessibility	Yes	No	Yes	No
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality of Care	High	Low	High	Low
Healthcare System Patient Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Provider Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Performance	Good	Poor	Good	Poor
Healthcare System Efficiency	High	Low	High	Low
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality	High	Low	High	Low
Healthcare System Availability	Yes	No	Yes	No
Healthcare System Affordability	Yes	No	Yes	No
Healthcare System Accessibility	Yes	No	Yes	No
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality of Care	High	Low	High	Low
Healthcare System Patient Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Provider Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Performance	Good	Poor	Good	Poor
Healthcare System Efficiency	High	Low	High	Low
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality	High	Low	High	Low
Healthcare System Availability	Yes	No	Yes	No
Healthcare System Affordability	Yes	No	Yes	No
Healthcare System Accessibility	Yes	No	Yes	No
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality of Care	High	Low	High	Low
Healthcare System Patient Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Provider Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Performance	Good	Poor	Good	Poor
Healthcare System Efficiency	High	Low	High	Low
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality	High	Low	High	Low
Healthcare System Availability	Yes	No	Yes	No
Healthcare System Affordability	Yes	No	Yes	No
Healthcare System Accessibility	Yes	No	Yes	No
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality of Care	High	Low	High	Low
Healthcare System Patient Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Provider Satisfaction	Satisfied	Dissatisfied	Satisfied	Dissatisfied
Healthcare System Performance	Good	Poor	Good	Poor
Healthcare System Efficiency	High	Low	High	Low
Healthcare System Effectiveness	Yes	No	Yes	No
Healthcare System Safety	Yes	No	Yes	No
Healthcare System Quality	High	Low	High	Low
Healthcare System Availability	Yes	No	Yes	No
Healthcare System Affordability	Yes	No		

5

10 BACKGROUND OF THE INVENTION

20 The increased flexibility afforded by mobile computing has come at the
expense of eroded network security. When a user roams the network and remotely
accesses services and/or resources on the network, network integrity can be exposed
to significant security risks. Specifically, various types of attack can be launched at
any enabled access location on the network. Passive wiretapping, active wiretapping,
25 IP sniffing, and identity spoofing are only some examples of these types of attacks.

According to the present invention, a secure agent communications system is provided for operation in conjunction with a Blackboard Messaging System (BMS) such as MicMac. An overall framework is developed for a general case of multi-agent communication to mutually authenticate parties and establish secure dynamic sessions. This framework is implementation independent and capable of supporting

different authentication and key exchange protocols. Moreover, the system according to the present invention accommodates both the protection of pure communication data and information used for control purposes (e.g. routing, QoS, etc.)

5 Therefore, in accordance with an aspect of the invention there is provided a virtual network communication system for effecting secure communications between user agents at different sites within said virtual network, comprising at least one Private Tuple Space within each of the sites for effecting intra-site communications between the agents, a Shared Tuple Space for effecting inter-site communications
10 between different sites, and a Coordinator Manager within each of the sites for receiving user initiated communication requests from the Private Tuple Space to communicate between user agents at the different sites, authenticating the requests and in response dynamically creating and managing instances of Coordinators at each of the different sites which embed messages from the user agents in secure tuples and
15 exchange the secure tuples over the Shared Tuple Space.

 According to another aspect of the invention there is provided a method of effecting secure virtual network communications between user agents at different sites within said virtual network, comprising the steps of authenticating user initiated
20 requests to communicate between user agents at different sites, generating and forwarding an inner key to each of the user agents at the different sites for encrypting and decrypting messages exchanged there between, and dynamically creating and managing instances of Coordinators at each of the different sites for embedding the messages in secure tuples and exchanging the secure tuples over a Shared Tuple Space
25 between the different sites.

 In accordance with yet another aspect of the invention, the method includes steps of generating two dynamic identifiers for creating the Coordinator instances and generating a hashed value of the inner key for encrypting and decrypting the secure
30 tuples.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of a preferred embodiment of the present invention is provided herein below with reference to the following drawings, in which:

5

Figure 1A is a three-layered architecture diagram of a Personal Mobility Management System (PMMS) forming the preferred environment for implementation of the present invention;

10

Figure 1B is a schematic illustration of inter-site communication using a shared Agora for the PMMS system of Figure 1A;

Figure 2 is a block diagram of a secure communication framework in accordance with the present invention;

15

Figure 3 is a message flow diagram showing a sequence of messages for an exemplary communication session in accordance with the principles of the present invention;

20

Figure 4 is a block diagram of the secure communication framework of Figure 2 for the exemplary communication session of Figure 3; and

Figure 5 shows a preferred format for an inter-site communication tuple format in accordance with the present invention.

25

Figure 6 is the message flow diagram of Figure 3 expanded to show authentication and key exchange transactions in accordance with the preferred embodiment.

30

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In the absence of explicit mechanisms, personal communication over an unsecure channel like the Internet can be viewed or modified, registered users can be

impersonated, users' accounts can be compromised, etc. As discussed in greater detail below, the security principles of the present invention have been applied to a prototype mobile computing system known as Personal Mobility Management System (PMMS). This system has been designed and implemented by the Mobile Agent

5 Alliance, which is a collaboration of the University of Ottawa, Mitel Corporation and the National Research Council of Canada. PMMS provides personalized services and access to resources for nomadic users over a network, resulting in a mobile working environment which is similar to the user's home environment. PMMS implements dynamic mapping between a user and the shared devices (or services) available at any

10 location within the network. The dynamic mapping functionality is obtained using the Internet *LDAP directory*. Another inherent aspect of PMMS is universal messaging for handling the communications needs of mobile users. Messaging is largely addressed by the interaction of autonomous programs (agents), representing users, services, and data resources.

15

Figure 1A shows the three-layered architecture of PMMS. Each enabled site within the virtual network maintains this or an analogous structure. Each site also manages a X.500 Directory Information Base (DIB) for its organizational network. This DIB physically resides in the first layer (i.e. in the Data Repository (referred to

20 occasionally hereinafter as D.R.)). The first layer (Layer 1) contains all of the data information such as user profiles, service profiles and access policies. This layer is only accessible to the middle layer (Layer 2).

Layer 2 deploys intra-site processing agents, as follows:

- 25
- **Site Profile Agent** negotiates, with its remote peer (in a user's home site), the user's preferences, and dynamically determines the authorized services for the user, in accordance with the two sets of policies of both concerned sites.
 - **Policy Server** maintains the obligations and authorizations allowed or denied to each agent. The server contains the private knowledge base (for each site)

30

 - regarding authorized services, accessible resources and management rules (cost, delay, privileges, etc.).
 - **Resource Agent** negotiates, with its peer, resources for each requested and authorized service. It also creates an environment for this service. Negotiation

between two resource agents determines the availability and accessibility of local resources before processing the service.

- **Coordinator** manages the inter-agent communications. Its central role is to establish communication among two or more agents (locally or remotely), to locate agents and to control their activities when exchanging information.

Layer 3 presents a Graphical User Interface (GUI) for the nomadic users. It contains agents and interfaces for user authentication and service access. A mobile user logs onto the system via the User Logon Agent, which functions as the authentication client of the system. After receiving user information as input by the user, the User Logon Agent locates the user in the virtual network and authenticates the user as the one he/she claims to be. A Service Access Agent is responsible for providing dynamically located services to the authenticated user. This interface will not be displayed if the user cannot be identified by his/her home site.

Interactions between agents are established through the exchange of KQML messages over the MicMac blackboard messaging system developed by Mitel Corporation (see *Feature Interaction Visualization and Resolution in an Agent Environment*, by Buhr et al in *Feature Interactions in Telecommunications and Software Systems V*, K. Kimbler, L.G. Bouma Eds, IOS Press, Amsterdam 1998). MicMac is a set of software tools, which provide an environment to support hands-on experimentation with multi-agent interaction and negotiation protocols. It allows for the creation and the manipulation of one or more Agoras (i.e. tuple spaces). A tuple space is an open area for exchanging information. An example of a shared tuple space is shown in Figure 1B for effecting inter-site communication according to the principles of the present invention. In this example, the tuple space is shared among three organizations, namely Mitel Corporation, National Research Council of Canada and University of Ottawa. Inter-organization communication messages are exchanged on this shared tuple space, while each organization may implement their own private tuple space in order to handle inter agent communications.

The server supports access by co-located clients as well as by remote (networked) clients. Network connections do not directly end up at the Agora server

itself; actually they are handled by a specialized local Agora client acting as a shared proxy for networked clients. The service interface offered by an Agora server consists of a small and simple set of primitives (see Table 1), which trigger specific processing requests over tuple space content.

Table 1. Primitive Set of Agora

Primitives	Timeout ^a	Request Description
Post	Yes ^b	Add a tuple to a tuple space
Pick	Yes ^c	Extract a tuple from a tuple space
Peek	Yes ^c	Read a tuple in a tuple space
Cancel	No	Terminate a pending pick/peek request

a. optional temporal constraint (specified as an optional parameter of the primitive)

b. constraint affects tuple persistency

c. constraint affects request persistency

The *post* and *cancel* primitives return control to the caller immediately. The *pick* and *peek* primitives however remain pending at the server until an entry in the tuple space satisfies the tuple template specified by the primitive, an associated temporal constraint takes effect, or a cancel primitive specifying a matching tuple template is issued by another client. It should be noted that the effect of a cancel primitive is not persistent (i.e. it is not withheld by a server if no matching pick/peek request exist when it is processed).

An example message exchange using tuples illustrates how communication is effected using the MicMac Agora:

1) caller Alice sends a message ("Hello") to callee Bob by performing a **post** operation:

post Tuple{("sender", "Alice"), ("receiver", "Bob"), ("content", "Hello")} (Tp 1)

2) in order to receive the message, callee Bob must register himself to the tuple space by launching a **pick** request of the same format as shown below:

pick Tuple{("sender", "Alice"), ("receiver", "Bob"), ("content", any)} (Tp 2) or

pick Tuple{("sender", any), ("receiver", "Bob"), ("content", any)} (Tp 3)

In this example, "sender", "receiver" and "content" are the **keys** of each Tuple, while "Alice", "Bob", "Hello" are the corresponding **values**. These **values** could be Tuples

as well. There is another important reserved variable called **any**, which can be used as the **value** of any **key** to ignore that particular attribute field. In this case, Tp 2 can extract any message from Alice to Bob, while Tp 3 can extract any message from anyone to Bob, etc. provided that all the messages use the same “sender --- receiver --- content” format. Consequently, both the caller and the callee must agree on a certain type of format (key combination) before they communicate. However, if some other agent has knowledge of this format, it could be able to remove or browse all the messages of this type posted on the Tuple space, thereby giving rise to several security problems. These problems include, but are not limited to message reply, modification of information, passive eavesdropping, denial of services etc.

Ensuring secure communication on top of the MicMac tuple space is essential to the entire system integrity of PMMS. As indicated above, the security strength of MicMac Agora depends on the confidentiality of the tuple format (i.e. the randomness of the keys that constitute the tuple attributes). The API of the MicMac Agora as used in PMMS does not permit an agent to pick/peek messages on the tuple space unless it has the knowledge of the key combination. Both the calling agent and the called agent must agree on a certain pattern for their communication session in order to proceed. Specifically, according to the PMMS, both agents employ a “sender --- receiver --- content” tuple format to exchange messages.

There are several security risks in this system. Firstly, in order to establish a secure communication session, all parties involved in the communication should secretly agree on a key combination prior to exchanging messages. In addition to adding significant processing overhead, this scheme is vulnerable to attackers, as set forth in greater detail below. Secondly, the key combination must be changed frequently. Otherwise, a compromised combination gives rise to compromised future communications using this key combination. More importantly, if a malicious agent is permitted access to the physical memory on the server which supports the MicMac Agora, the agent will be able to eavesdrop on, or arbitrarily modify any tuple.

Another example will serve to illustrate the possible consequences of a compromised key combination (namely, messages exchanged on top of MicMac

being recorded, replayed, modified or removed by some entity other than the expected receiver). Assume that the format of the tuple in a communication session between Alice and Bob is "sender --- receiver --- content", and an attacker happens to know this format. The attacker can then issue any of the attacks listed in Table 2, for malicious purposes.

Table 2. Attacks on MicMac Tuple

Attack	Action
Record/Eavesdropping	Peek <i>Tuple</i> {("sender", any), ("receiver", any), ("content", any)}
Remove/Denial of Service	Pick <i>Tuple</i> {("sender", any), ("receiver", any), ("content", any)}
Bomb/Denial of Service	Post <i>Tuple</i> {("sender", "Alice"), ("receiver", "Bob"), ("content", "It's party time!")}
Message Replay	Peek , then post the original Tuple in a later time
Message Reorder	Pick all, then post those messages in a different order
Modify/Active Wiretapping	Pick , change the <i>values</i> , then post the modified version

In order to launch any of the above requests, the attacker requires knowledge of the tuple format between Alice and Bob. However, experience has shown that software hackers are adept at obtaining such information. In fact, this information may become available to the attacker as a result of the negotiation which must take place between Alice and Bob before they exchange the actual messages, in order to decide on the tuple format. Of course, either party (Alice or Bob) can send secure e-mail or certified mail to the other party concerning the format of their next communication. However, human intervention is required in order to change the program periodically to introduce different tuple formats. On the other hand, use of a default pattern such as "sender --- receiver --- content", although automatic, allows an attacker to **peek** the contents of the messages exchanged between Alice and Bob in order to determine the tuple format and launch attacks later on.

Based on the concept of a Virtual Private Network (VPN), an information fortress model has been developed in accordance with the invention for the communication framework of the system. As illustrated in Figure 2, Coordinators in each site act as "software routers" forming a "virtual firewall" for separating incoming and outgoing messages from the intra-site communications. Two types of tuple spaces are employed to handle inter-agent communications. All of the outgoing messages are

encrypted and then posted to a Shared Tuple Space which is known to all sites/organizations in the network, whereas the intra-site communication messages are exchanged on a Private Tuple Space known only to local agents. These latter messages may either be encrypted or exchanged in clear form. If encrypted, the local encryption keys are completely irrelevant to the Coordinators.

The framework of Figure 2 allows the system to ensure secure communication between sites, independently of the agents. Since it is the responsibility of the Coordinators to implement inter-site data encryption, decryption and other security operations such as digital signature, agents can be developed and implemented without requiring consideration of inter-site communication privacy. Provided that the Coordinators are properly installed and configured at each site, the architecture of a system in accordance with the inventive framework may be implemented on a very large scale.

The Coordinator Manager (CM) is a software component which is responsible for initializing and managing the site Coordinators. There is only one CM at each site. The identity/name of the site CM is the only public information provided to the outside world, and it is globally unique. One pair of Coordinators is created/initiated for every inter-site communication session by the CMs of the two sites, following successful user/agent authentication. This framework also enables the Coordinators to screen the sender's information, such as the caller's ID, for each outgoing message. This feature is particular important in countering *Traffic Analysis* attacks which might otherwise be launched against the MicMac Tuple Space.

To illustrate how the framework of Figure 2 works, consider an example wherein Alice from Mitel sends a "Hello" message to Bob at NRC . Figure 3 shows the message flow for such an exchange. According to the framework, Alice first **posts** a tuple to the *Private Tuple Space* at Mitel:

(1) $\text{Tuple}\{("sender", "Alice@Mitel"), ("receiver", "C01@Mitel"), ("forwardTo", "Bob@NRC"), ("content", "Hello")\}$

The coordinator "C01@Mitel" then **picks** this tuple by listening to the Private Tuple Space, as follows:

(2) $Tuple\{("sender", any), ("receiver", "C01@Mitel"), ("forwardTo", any), ("content", any)\}$

Then, the coordinator will convert the picked tuple to another tuple, and **post** it to the *Shared Tuple Space*:

5 (3) $Tuple\{("sender", "C01@Mitel"), ("receiver", "C02@NRC"), ("content", aTuple)\}$

Where $aTuple = Tuple\{("sender", "Alice@Mitel"), ("receiver", "Bob@NRC"), ("content", "Hello")\}$

10 Next, the coordinator called "C02@NRC" **picks** this tuple by registering the following request at the Shared Tuple Space:

(4) $Tuple\{("sender", "C01@Mitel"), ("receiver", "C02@NRC"), ("content", any)\}$

After stripping off the unwanted headers, C02@NRC forwards the content to Bob via the Private Tuple Space at NRC in form of a tuple, as follows:

15 (5) $Tuple\{("sender", "C02@NRC"), ("receiver", "Bob@NRC"), ("content", aTuple)\}$

Bob then retrieves the message from the Private Tuple Space by sending a **pick** request as follows:

(6) $Tuple\{("sender", "C02@NRC"), ("receiver", "Bob@NRC"), ("content", any)\}$

20

Finally, Bob parses the tuple and extracts the value of *content*, thereby recovering the message "Hello" from Alice.

25 If both Coordinators have agreed on one secret key, tuples on the *Shared Tuple Space*, such as the tuple (3), can be encrypted (completely or partially) using the secret key, as follows:

Part encryption:

30 (a) $Tuple\{("sender", "C01@Mitel"), ("receiver", "C02@NRC"), ("content", E(aTuple))\}$

(b) $\text{Tuple}\{E(\text{"sender"}), \text{"C01@Mitel"}, (E(\text{"receiver"}), \text{"C02@NRC"}),$
 $(E(\text{"content"}), a\text{Tuple})\}$

Full encryption:

5 (c) $\text{Tuple}\{(E(\text{"sender"}), E(\text{"C01@Mitel"})), (E(\text{"receiver"}), E(\text{"C02@NRC"})),$
 $(E(\text{"content"}), E(a\text{Tuple}))\}$

wherein $E(\text{"string"})$ means encrypt the string ("string"), which can be a key or a
 value, and wherein $E(a\text{Tuple})$ means encrypt all of the keys and values of the tuple
 10 (aTuple).

The first expression (a) only encrypts the value of the content field, so that an
 attacker would still be able to remove this tuple or use the same format to send
 "spam" messages to Bob. By way of contrast, the expression (c), although offering
 15 full security, is unwieldy and time consuming to implement. From a security point of
 view, the full encryption of (c) offers no advantages over (b) provided that appropriate
 measures are taken to protect the physical memory of the MicMac server from being
 scanned by unauthorized agents.

20 Nonetheless, the full encryption provided by (c) enables an agent to hide
 sensitive information inside the content of the embedded tuple so that neither the
 Coordinators nor other unintended agents are able to browse it. Moreover, the
 Coordinators of the session can utilize the outer fields of the message to include
 information for other network services such as routing or QoS. This control
 25 information is encrypted in order to counter *Traffic Analysis* attacks. Furthermore, it is
 important that this information not be encrypted using the same key as the one for the
 embedded tuple since the Coordinator would then be able to perform decryption on
 the embedded tuple and see the original message. Accordingly, two different session
 keys must be used, one (the outer key) for control information, and another (the inner
 30 key) for the embedded tuple (i.e. the "real" data). Rather than using two protocols for
 generating the inner and outer keys, any one of several well known traditional and
 reliable protocols may be used to establish the inner key, while the outer key is
 computed out of the inner key using a one way hash function. One advantage of this

solution is that the Coordinators can only encrypt/decrypt the control information, whereas the end users (i.e. caller and callee) are able to encrypt/decrypt the entire tuple.

5 Returning to the previous example, and assuming that the inner and outer keys have been created, the following message exchange takes place, wherein $E_o("M")$ means encrypt string M using the outer key, and $E_i("M")$ means encrypt M with the inner key.

10 First, Alice **posts** the following encrypted tuple to the Private Tuple Space.

(1) $\text{Tuple}\{(E_o(\text{"sender"}), E_o(\text{"Alice@Mitel"})), (E_o(\text{"receiver"}), E_o(\text{"C01@Mitel"})), (E_o(\text{"forwardTo"}), E_o(\text{"Bob@NRC"})), (E_o(\text{"content"}), E_i(\text{"Hello"}))\}$

15 The Coordinator "C01@Mitel" **picks** this tuple from the Private Tuple Space as follows:

(2) $\text{Tuple}\{(E_o(\text{"sender"}), \text{any}), (E_o(\text{"receiver"}), \text{"C01@Mitel"})), (E_o(\text{"forwardTo"}), \text{any}), (E_o(\text{"content"}), \text{any})\}$

Then, the Coordinator converts this tuple, and **posts** it to the *Shared Tuple Space*:

20 (3) $\text{Tuple}\{(E_o(\text{"sender"}), E_o(\text{"C01@Mitel"})), (E_o(\text{"receiver"}), E_o(\text{"C02@NRC"})), (E_o(\text{"content"}), a\text{Tuple})\}$

Where $a\text{Tuple} = \text{Tuple}\{(E_o(\text{"sender"}), E_o(\text{"Alice@Mitel"})), (E_o(\text{"receiver"}), E_o(\text{"Bob@NRC"})), (E_o(\text{"content"}), E_i(\text{"Hello"}))\}$

25 Next, the Coordinator "C02@NRC" **picks** this tuple by registering the following request on the Shared Tuple Space:

(4) $\text{Tuple}\{(E_o(\text{"sender"}), E_o(\text{"C01@Mitel"})), (E_o(\text{"receiver"}), E_o(\text{"C02@NRC"})), (E_o(\text{"content"}), \text{any})\}$

30 After stripping off the unwanted headers, C02@NRC forwards the contents to Bob via the Private Tuple Space at NRC in form of the following tuple:

(5) $\text{Tuple}\{(\text{Eo}(\text{"sender"}), \text{Eo}(\text{"C02@NRC"})), (\text{Eo}(\text{"receiver"}), \text{Eo}(\text{"Bob@NRC"})), (\text{Eo}(\text{"content"}), a\text{Tuple})\}$

Bob retrieves the message from the Private Tuple Space by sending the following **pick** request:

5 (6) $\text{Tuple}\{(\text{Eo}(\text{"sender"}), \text{Eo}(\text{"C02@NRC"})), (\text{Eo}(\text{"receiver"}), \text{Eo}(\text{"Bob@NRC"})),$
 $(\text{Eo}(\text{"content"}), \text{any})\}$

Finally, Bob parses the tuple and extracts the value of *content*, decrypts and then recovers the message "Hello" from Alice.

10 Since one random key needs to be created prior to the establishment of the secure communication session, an authentication framework has been developed in accordance with the present invention for implementing a proper authentication and key exchange protocol.

With reference to Figure 4, the caller (e.g. Alice) initiates the request (1) and sends it to the local site CM (e.g. Mitel_CM) via the Private Tuple Space A. The Mitel_CM picks the request (2), locates the home site of the intended receiver (e.g. Bob at NRC), and then transmits the request to the NRC site (3). Upon receiving the calling request (4), the NRC_CM transfers the request to Bob via the Private Tuple Space B at NRC ((5) and (6)). Before establishing the connection, the NRC_CM activates the Authentication Agent (User Logon Agent is an instance of Authentication Agent) to authenticate the caller. The agent proposes an authentication and key exchange protocol back to the Mitel_CM together (optionally) with some additional parameters via the dotted virtual path in Figure 4. The Mitel_CM decides whether or not to activate the second Authentication Agent, according to the local site security policy. Provided that the proposed authentication and key exchange protocol is allowed and supported at Mitel site, the two Authentication Agents follow the established schema to mutually authenticate the caller and the callee. During this authentication process, both the caller and the callee may be contacted by the Authentication Agents, which may or may not verify their identities against the site's private Data Repository (D. R.).

As a result of successful authentication and key exchanges, the two Authentication Agents agree on three pieces of secret information: one session key and two dynamic identifiers. The session key (i.e. inner key) is passed to the caller (Alice) and the callee (Bob), whereas the hashed value of the session key and the two
 5 identifiers are used to generate Coordinator instances. The creation of the two Coordinators establishes the secure communication session between Alice and Bob. The hashed value (i.e. outer key) assigned to the Coordinators is used to encrypt/decrypt all of the keys of the tuples as well as the values of outer fields used for control purpose. Alice and Bob then use the inner key to encrypt/decrypt the
 10 embedded tuple.

In accordance with another aspect of the invention, each site CM maintains a dynamic table containing the Ids of all on-line (i.e. active) agents and the Ids of their corresponding Coordinators. Using this table, the site CM is able to detect possible
 15 *Impersonation* attacks. By defining a unique ID for each agent, it is easy for the system to make sure that at any given time, there is no more than one session established for a particular agent.

Without a positive result of the authentication procedure, a communication
 20 session will not be initialized since no Coordinator will have been created. Thus, the only possible way for an attacker to break an established session is to correctly guess the two random IDs (preferably 64 bits each) of the Coordinators and the session key (preferably 112 bits). Such a correct guess would be extremely difficult and computationally infeasible.

Integrity checking is another important technique employed in the present invention to ensure secure communication. To achieve this, a Digital Signature is attached to the original message. Integrity of a message can then be verified by performing the same signature function on the message and comparing the result with
 30 the attached Digital Signature. In symmetric cryptosystem, digital signatures can be computed using one way hash functions such as MD4, MD5 or SHA (Secure Hash Algorithm). The a successful prototype of the present invention supports all of the foregoing signature functions.

The format for the tuples used in inter-site communication preferably should conform to a predetermined format, as shown in Figure 5.

5 The *Message ID* specifies a unique sequence number as well as the type of the message. *Security Header* contains information about the security settings of the current communication session, including the names of the encryption algorithm, the signature function and some parameters. An example of a security header is “Triple_DES-112 SHA-80”. *Sender ID* and *Receiver ID* specify the expected sender
10 and receiver of the tuple (which can, for example, be the names of the site CMs during the initialization period or the dynamic IDs of the Coordinators constituting the secure session). *Forward To* is used when one agent sends a message to another agent at a different site via Coordinators. The *Signature* field contains the digital signature of the entire tuple. The *Content* field is used to carry real communication data or the
15 embedded tuple. For additional control information, the *Others* field can be used. Moreover, additional *Others* fields may be added if needed.

During the initialization phase (i.e. authentication and key exchange), attributes are not encrypted. Furthermore, some attributes may not be used such as
20 *Security Header*, *Others* and *Signature*. However, once a secure session has been established, all of the attributes are used and encrypted.

Figure 6 illustrates the entire process for establishment of a secure communication session between Alice and Bob, including the message exchanges
25 between them. In this example, it is assumed that both waiting time and response time for all the exchanged tuples are negligible. This means that a posted tuple will be removed from the tuple space immediately, which indicates that the corresponding pick request should be registered at the tuple space prior to the arrival of the posted tuple. Continuing on the basis of this assumption, there are six pre-registered pick
30 requests for all of the three tuple spaces, with the format of the inter-site tuples being as set forth in Figure 5, and the format for the intra-site tuples being the same (for the sake of simplicity):

any	basic	CM@Mitel	Alice@Mitel	null	any	any	any
-----	-------	----------	-------------	------	-----	-----	-----

1.

2.

any	basic	any	CM@Mitel	any	any	any	any
-----	-------	-----	----------	-----	-----	-----	-----

5 3.

any	basic	any	CM@Mitel	null	any	any	any
-----	-------	-----	----------	------	-----	-----	-----

4.

any	basic	any	CM@NRC	null	any	any	any
-----	-------	-----	--------	------	-----	-----	-----

10 5.

any	basic	any	CM@NRC	any	any	any	any
-----	-------	-----	--------	-----	-----	-----	-----

6.

any	basic	CM@NRC	Bob@NRC	null	any	any	any
-----	-------	--------	---------	------	-----	-----	-----

The first tuple, for example, would be:

15

Tuple{("Message ID", any), ("Security Header", "basic"), ("Sender ID", "CM@Mitel"), ("Receiver ID", "Alice@Mitel"), ("Forward To", null), ("Others", any), ("Signature", any), ("content", any)}

20

The value "basic" can be defined as "null-0-sha-80", which means the tuple is not encrypted but is digitally signed using Secure Hash Algorithm. The signature contained in the tuple is the first 80 bits of the SHA output/digest.

25

Moreover, in order to carry binary data in a tuple, this data must be converted into a text stream. Base64 Encoding, as defined in MIME, was employed as the only one encoding algorithm in the successful prototype of this invention.

Tuples (1) through (3) are the initial tuples requesting the authentication process between Alice and Bob, as follows:

(1)

0001	basic	Alice@Mitel	CM@Mitel	Bob@NRC	null	sig1	Hello
------	-------	-------------	----------	---------	------	------	-------

30

where **sig1** stands for the actual encoded signature stream of the tuple,

(2)

0002	basic	CM@Mitel	CM@NRC	Bob@NRC	null	sig2	Tuple 1
------	-------	----------	--------	---------	------	------	---------

where **sig2** is the signature of the tuple, and **Tuple 1** is an embedded tuple defined as:
Tuple{("Message ID", "0001"), ("Sender ID", "Alice@Mitel"), ("Receiver ID",
 "Bob@NRC"), ("content", "Hello")}

5	(3)	0003	basic	CM@NRC	Bob@NRC	null	null	sig3	Tuple 1
---	-----	------	-------	--------	---------	------	------	------	---------

where **sig3** is the signature for tuple (3), and **Tuple 1** is the same one as described above in tuple (2).

10 Before posting any tuple to the tuple space, the creator/sender of the tuple is responsible for calculating the digital signature for the entire tuple. On the other hand, , the receiver must verify the integrity of the tuple by checking the value of the signature field immediately after removing a tuple from the tuple space. If the receiver determines that the tuple has been changed during transmission, the receiver discards
 15 the message and/or asks the sender to re-send it.

Once Bob recovers the "Hello" message, the mutual authentication process begins. The authentication agent inside the site CM (see Figure 4) is responsible for initiating this task. The details of the authentication process are not described in any
 20 further detail herein, but conform to well known standard authentication and key exchange protocols.

As a result of the authentication and key exchange process, the two parties have an agreed security setting (**SecSet**) for the session, and the following random
 25 numbers have been generated:

- a. An **inner key (Ki)**, which is the result of the key exchange.
- b. Two dynamic IDs (**RM** and **RN**), which are used to create dynamic Coordinators for the session.
- c. An **outer key (Ko)**, which is the hashed value of the **inner key**.

30 **Ki** is passed to Alice and Bob by their respective corresponding authentication agents. **RM**, **RN** and **Ko** are used as parameters when creating the Coordinator

instances: **RM** as the identifier for the Mitel Coordinator and **RN** for the NRC Coordinator.

After establishment of the communication session, Alice, Bob and the two
 5 Coordinators immediately register to the tuple spaces for any incoming messages.
 Figure 6 shows registration of six (7 ~ 12) such requests, in total, wherein the
 keys/attributes of the tuple are encrypted using **Ko**:

7.	any	SecSet	RM@Mitel	Alice@Mitel	null	any	any	any
----	-----	--------	----------	-------------	------	-----	-----	-----

10

The text version for the above tuple is:

Tuple{(Eo("Message ID"), any), (Eo("Security Header"), "SecSet"), (Eo("Sender ID"), "RM@Mitel"), (Eo("Receiver ID"), "Alice@Mitel"), (Eo("Forward To"), null), (Eo("Others"), any), (Eo("Signature"), any), (Eo("content"), any)}

15

8.	any	SecSet	Alice@Mitel	RM@Mitel	Bob@NRC	any	any	any
----	-----	--------	-------------	----------	---------	-----	-----	-----

The value of the field "Forward To" (Bob@NRC) is optional, because
 RM@Mitel will only communicate with RN@NRC, which forwards the message to
 20 Bob only.

9.	any	SecSet	RN@NRC	RM@Mitel	Alice@Mitel	any	any	any
----	-----	--------	--------	----------	-------------	-----	-----	-----

10.	any	SecSet	RM@Mitel	RN@NRC	Bob@NRC	any	any	any
-----	-----	--------	----------	--------	---------	-----	-----	-----

25

11.	any	SecSet	Bob@NRC	RN@NRC	Alice@Mitel	any	any	any
-----	-----	--------	---------	--------	-------------	-----	-----	-----

12.	any	SecSet	RN@NRC	Bob@NRC	null	any	any	any
-----	-----	--------	--------	---------	------	-----	-----	-----

30 Because of the randomness of the outer key (**Ko**), which is used to encrypt the
 attributes, it is infeasible for any other agent to generate any of the above requests.

After the foregoing message exchange, Alice sends her message to Bob in a secret way. First, she encrypts the message (**Msg**) using the inner key (**Ki**), and assigns the result of the encryption (**Ei(Msg)**) as the value of the content, or more accurately, the **Eo("content")** field.

5 (4)

0004	SecSet	Alice@Mitel	RM@Mitel	Bob@NRC	null	sig4	Ei(Msg)
------	--------	-------------	----------	---------	------	------	---------

This tuple is then picked by RM@Mitel, and forwarded to RN@NRC in the following tuple:

10 (5)

0005	SecSet	RM@Mitel	RN@NRC	Bob@NRC	null	sig5	Ei(Msg)
------	--------	----------	--------	---------	------	------	---------

It should be noted that, in tuple (5), although an embedded tuple could be used in the content field, it is not necessary since Bob will know that the message comes from Alice once he receives the following one from RN@NRC.

15

0006	SecSet	RN@NRC	Bob@NRC	null	null	sig6	Ei(Msg)
------	--------	--------	---------	------	------	------	---------

After Bob receives this tuple, he can decrypt the value of the content field (**Ei(Msg)**) using the inner key (**Ki**) and thereby recover the message **Msg** from Alice.

20

In summary, according to the present invention the hashed value of the random inner key which is used to encrypt pure communication data or embedded tuples, is used to encrypt the header information for control purpose. Therefore, communication entities/agents are able to see the entire content of a tuple, whereas authorized routing components or Coordinators only see the format of the tuple and some control information. Unauthorized agents or Coordinators are prevented from seeing any tuple content of an established session even if they have knowledge of the format/key combinations of the session.

30 Other embodiments and variations of the invention are possible. All such additional embodiments and applications are believed to be within the sphere and scope of the invention as defined by the claims appended hereto.

What is claimed is:

1. A virtual network communication system for effecting secure communications between user agents at different sites within said virtual network, comprising:

5

at least one Private Tuple Space within each of said sites for effecting intra-site communications between agents at each of said sites;

a Shared Tuple Space for effecting inter-site communications between said
10 different sites; and

a Coordinator Manager within each of said sites for receiving user initiated communication requests from said Private Tuple Space to communicate between user agents at said different sites, authenticating said requests and in response dynamically creating and managing instances of Coordinators at each of said different sites which embed messages from said user agents in secure tuples and exchange said secure tuples over said Shared Tuple Space.

2. The virtual network communication system of claim 1, wherein each said
20 Coordination Manager further includes an Authentication Agent for negotiating
authentication and key exchange protocols there between and in response generating
and forwarding an inner key to each of said user agents at said different sites for
encrypting and decrypting said messages embedded in said secure tuples, and for
generating two dynamic identifiers used to create said Coordinator instances and a
25 hashed value of said inner key for encrypting and decrypting said secure tuples.

3. The virtual network communication system of claim 2, further including a Data Repository within each of said sites for storing authentication data applicable to local ones of said user agents, said authentication data being accessible to said Authentication Agent for negotiating said authentication and key exchange protocols.

4. The virtual network communication system of claim 1, wherein said Coordinator Manager further includes a dynamic table containing IDs of all active

ones of said user agents and corresponding ones of said Coordinators for detection of impersonation attacks against said virtual network communication system.

5. The virtual network communication system of claim 1, wherein said
5 Coordinators calculate and verify digital signatures for each of said secure tuples thereby ensuring message integrity.

6. A method of effecting secure virtual network communications between user agents at different sites within said virtual network, comprising the steps of:
10 authenticating user initiated requests to communicate between user agents at said different sites;

generating and forwarding an inner key to each of said user agents at said
15 different sites for encrypting and decrypting messages exchanged there between; and

dynamically creating and managing instances of Coordinators at each of said different sites for embedding said messages in secure tuples and exchanging said secure tuples over a Shared Tuple Space between said different sites.

20 7. The method of claim 6, further comprising the steps of generating two dynamic identifiers for creating said Coordinator instances and generating a hashed value of said inner key as said outer key for encrypting and decrypting said control information in said secure tuples.

25 8. The method of claim 6, further comprising the step of separating QoS and other control information needed by said network from user information communicated between said user agents.

30 9. The method of claim 8, further comprising the steps of:

ABSTRACT

According to the present invention, a virtual network communication system is provided for effecting secure communications between user agents at different sites within said virtual network, comprising at least one Private Tuple Space within each of the sites for effecting intra-site communications between the agents, a Shared Tuple Space for effecting inter-site communications between different sites, and a Coordinator Manager within each of the sites for receiving user initiated communication requests from the Private Tuple Space to communicate between user agents at the different sites, authenticating the requests and in response dynamically creating and managing instances of Coordinators at each of the different sites which embed messages from the user agents in secure tuples using multi-layered encryption and exchange the secure tuples over the Shared Tuple Space.

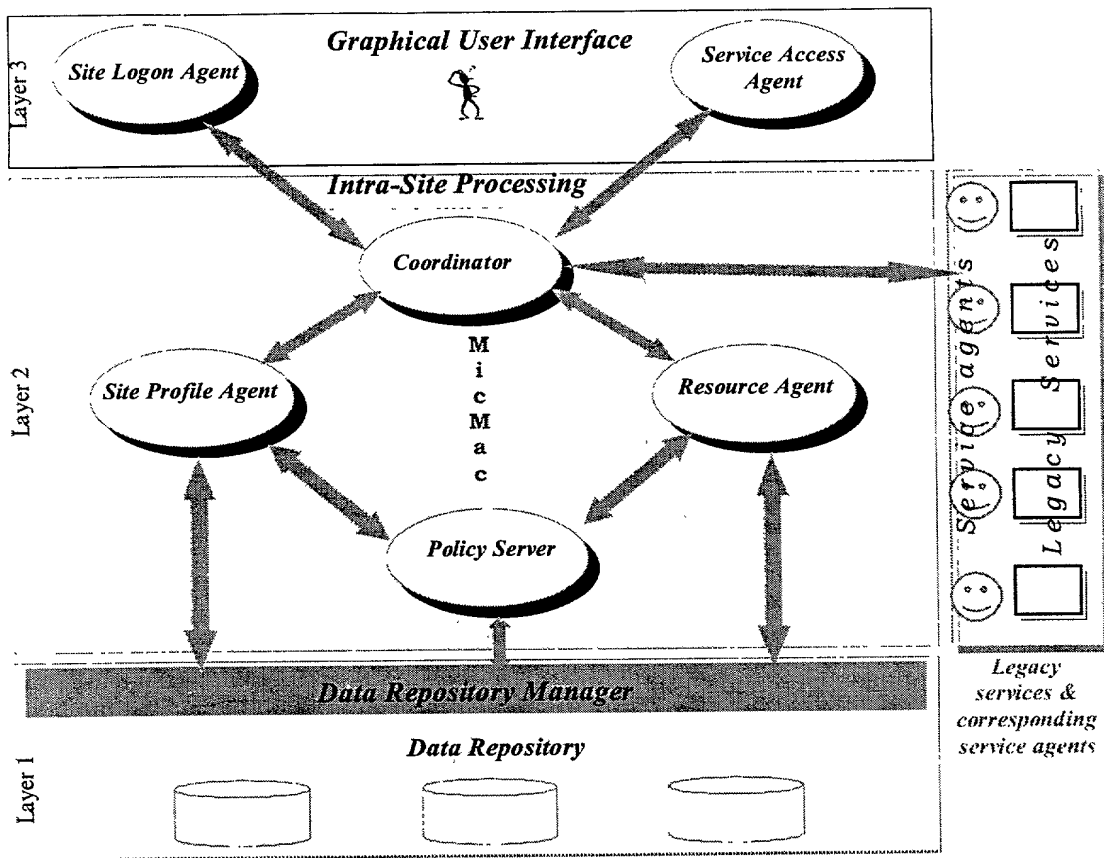


Figure 1A

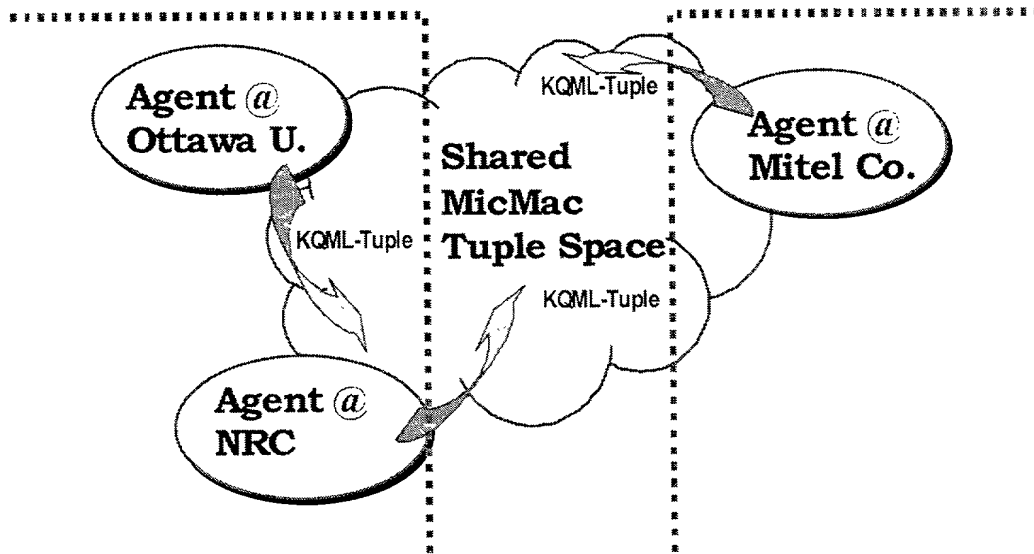


Figure 1B

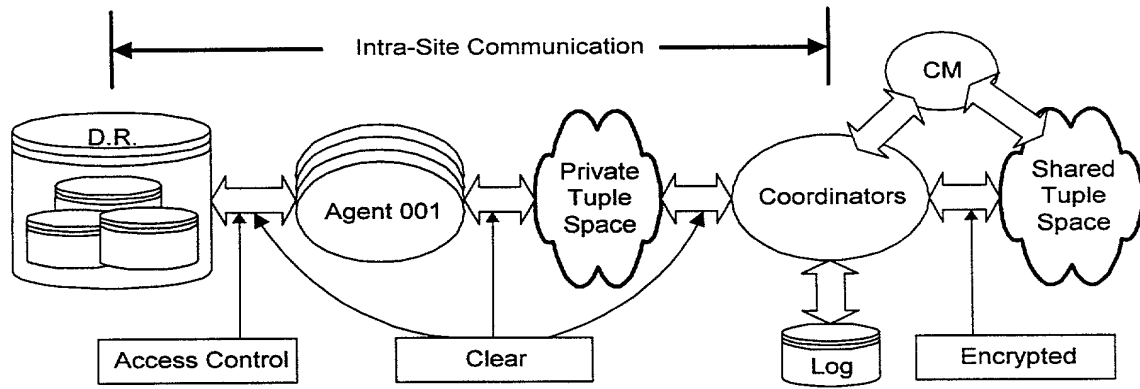


Figure 2

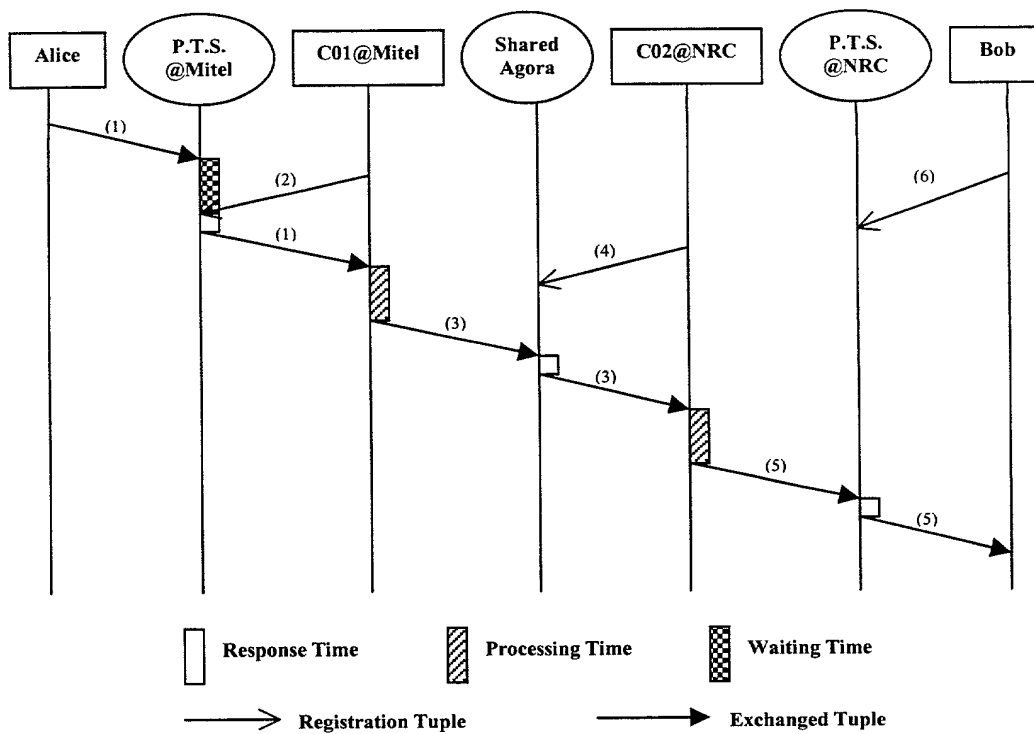


Figure 3

The diagram illustrates the architecture of the system, showing the interaction between two sites: Mitel Site and NRC Site.

Mitel Site:

- Alice:** The user on the Mitel site.
- Mitel_CM (Authentication Agent):** The central component on the Mitel site, connected to Alice (1), Private Tuple Space A (2), and the Shared Tuple Space (3).
- Private Tuple Space A:** A cloud representing the private tuple space on the Mitel site.
- Coordinator 287a 66fd:** The coordinator on the Mitel site, connected to Mitel_CM (create) and the Shared Tuple Space.
- D.R. (Data Repository):** A database connected to Mitel_CM.

NRC Site:

- Bob:** The user on the NRC site.
- NRC_CM (Authentication Agent):** The central component on the NRC site, connected to Bob (6), Private Tuple Space B (5), and the Shared Tuple Space (4).
- Private Tuple Space B:** A cloud representing the private tuple space on the NRC site.
- Coordinator a631 89fc:** The coordinator on the NRC site, connected to NRC_CM (create) and the Shared Tuple Space.
- D.R. (Data Repository):** A database connected to NRC_CM.


Shared Tuple Space: A central cloud representing the shared tuple space between the two sites.

Secure Session: A dashed box representing the secure session established between the two Coordinators.

Legend:

- Encrypted with Inner Key:** Represented by a dashed arrow.
- Encrypted with outer key:** Represented by a solid arrow.

Figure 5

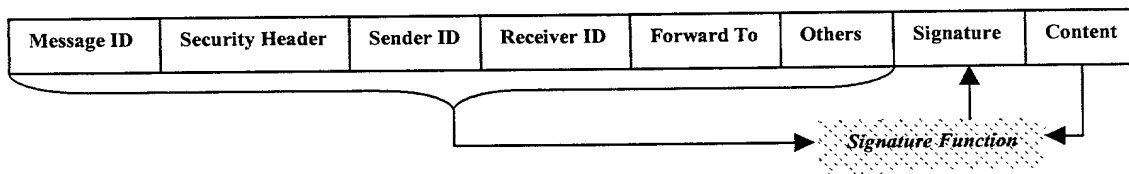

(Joint Inventors - Foreign)

We, **Ahmed KARMOUCH**, **Tom GRAY**, **Serge MANKOVSKII** and **Cui ZHENG** hereby declare that we are, respectively,

a citizen of **Canada**, residing at **2000 Rolling Brook Drive, Gloucester, Ontario, K2W 1C7**;

a citizen of **Canada**, residing at **11 Pineridge Road, RR#3 Carp, Ontario, K0A 1L0**;

a citizen of **Canada**, residing at **3096 Old Almonte Road, Carp, Ontario, K0A 1L0**; and

a citizen of Canada, residing at c/o Sim & McBurney, 6th Floor, 330 University Avenue, Toronto,
Ontario, Canada, M5G 1R7

that we have reviewed and understand the content of the specification, including the claims, (Jones, Day, Reavis & Pogue Docket No. 481340010027)

attached hereto:

and we believe that we are the original, first, and joint inventors of the subject matter which is claimed therein and for which a patent is sought on the invention or discovery entitled

SECURITY MECHANISMS AND ARCHITECTURE FOR COLLABORATIVE SYSTEMS USING TUPLE SPACE

and that we acknowledge our duty to disclose information of which we are aware which is material to the examination of this application, in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

We hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Date

Priority Claimed

9923544.2
(Number)

GB
(Country) (PCT)

05/OCTOBER/1999 Yes (X) No ()
(Day/Month/Year)

We hereby designate the following as our mailing address and telephone number:

David B. Cochran
Jones, Day, Reavis & Pogue
North Point
901 Lakeside Avenue
Cleveland, Ohio 44114
(216) 586-3939

and appoint each of the following as our attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Kenneth R. Adamo, Registration No. 27,299; Barbara Arndt, Registration No. 37,768; David B. Cochran, Registration No. 39,147; Cheryl L. Farine, Registration No. 36,796; Regan J. Fay, F. Drexel Feeling, Registration No. 40,602; Registration No. 26,878; Calvin P. Griffith, Registration No. 34,831; Paul F. Keller, Registration No. 42,713; Timothy J. O'Hearn, Stephen D. Scanlon, Registration No. 32,755; Registration No. 31,552; Duane H. Switzer, Registration No. 22,431; Michael W. Vary, Registration No. 30,811; Jason Vierra-Eisenberg, Registration No. 43,447; and James L. Wamsley, III, Registration No. 31,578;

all having the above designated address.

We further declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date X November 1, 1999

Name: Ahmed KARMOUCH 

Post Office Address: 2000 Rolling Brook Drive, Gloucester, Ontario, K2W 1C7, Canada

Date X Nov 1, 1999

Name: Tom GRAY 

Post Office Address: 11 Pineridge Road, RR3 Carp, Ontario, K0A 1L0, Canada

Date + NOV 1, 98
+ [Signature]

Name: Serge MANKOVSKII

Post Office Address: 3096 Old Almonte Road, Carp, Ontario, K0A 1L0, Canada

Date + Nov 1st, 1998
+ [Signature]

Name: Cui ZHENG

Post Office Address: c/o Sim & McBurney, 6th Floor, 330 University Avenue, Toronto, Ontario, Canada, M5G 1R7